

# UC-1200A Series

*Arm Cortex-A53 dual-core 64-bit 1 GHz Industrial Computers with 1 mPCIe expansion slot, -40 to 60°C operating temperature*



## Features and Benefits

- Armv8 Cortex-A53 dual-core 1 GHz processor
- 2 auto-sensing 10/100/1000 Mbps Ethernet ports
- Rich programmable LEDs and a programmable button for easy installation and maintenance
- Mini-PCIe slot for wireless module
- -40 to 60°C operating temperature range
- Long-term Linux support until 2031; includes bug fixes and security patches

## Certifications




## Introduction

The UC-1200A computing platform is designed for embedded data-acquisition applications. The computer comes with dual RS-232/422/485 serial ports and dual 10/100/1000 Mbps Ethernet ports, as well as a Mini PCIe socket to support a wireless module. These versatile capabilities let users efficiently adapt the UC-1200A to a variety of complex communications solutions.

The UC-1200A is built around a Cortex-A53 processor that has been optimized for use in energy monitoring systems, but is widely applicable to a variety of industrial solutions. With flexible interfacing options, this tiny embedded computer is a reliable and secure gateway for data acquisition and processing at field sites as well as a useful communications platform for many other large-scale deployments.

# Appearance

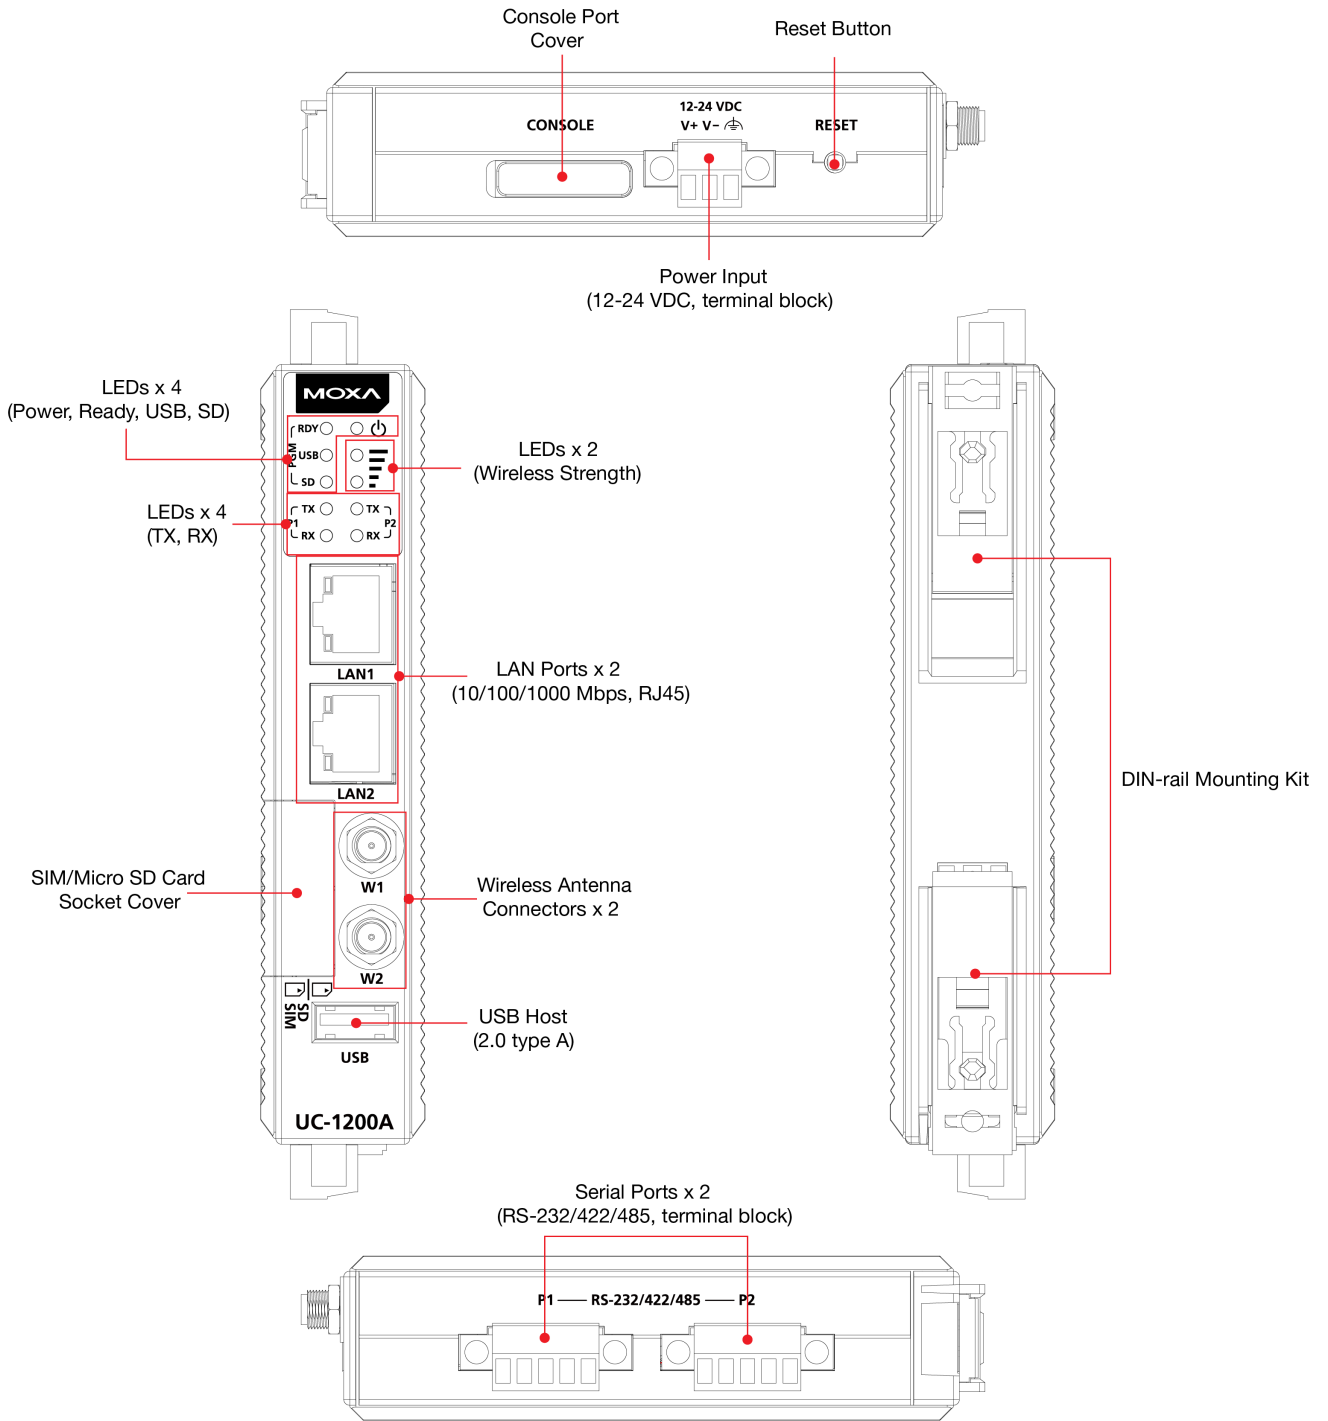

# Specifications

## Computer

CPU	Armv8 Cortex-A53 dual-core 1GHz
DRAM	2 GB DDR4
Pre-installed OS	Moxa Industrial Linux (Debian 11, kernel 5.10), 2031 EOL See <a href="http://www.moxa.com/MIL">www.moxa.com/MIL</a>
Storage Pre-installed	16 GB eMMC
Storage Slot	micro SD slots x 1

## Computer Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Serial Ports	RS-232/422/485 ports x 2, software selectable (terminal block)
USB 2.0	USB 2.0 hosts x 1, type-A connectors
Console Port	RS-232 (TxD, RxD, GND), 4-pin header output (115200, n, 8, 1)
Expansion Slots	mPCIe slots x 1
Number of SIMs	1
SIM Format	Nano
Buttons	Reset button
TPM	TPM v2.0

## Ethernet Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Magnetic Isolation Protection	1.5 kV (built-in)

## Serial Interface

Baudrate	300 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
Flow Control	RTS/CTS XON/XOFF Automatic Data Direction Control (ADDC) for RS-485 RTS Toggle (RS-232 only)

## Serial Signals

RS-232	TxD, RxD, RTS, CTS, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

## LED Indicators

System	Power x 1 SW ready (programmable) USB (programmable) x 1 Micro SD slot (programmable) x 1 Serial Port: TX x 2, RX x 2
Wireless Signal Strength	Cellular x 2; programmable Disconnected: None Very Poor Signal: 1 LED (blinking) Poor Signal: 1 LED Good Signal: 2 LEDs

## Power Parameters

Input Current	600 mA @ 12 VDC 300 mA @ 24 VDC
Input Voltage	12 to 24 VDC
Power Consumption	4.5 W (minimum; without external USB device attached) 7.2 W (maximum; with external USB device attached)

## Reliability

Alert Tools	External RTC (real-time clock) External WDT (watchdog timer)
-------------	---

## Physical Characteristics

Dimensions	101 x 27 x 128 mm (3.98 x 1.06 x 5.04 in)
Weight	224 g (0.5 lb)
Housing	Polycarbonate (PC)
Installation	DIN-rail mounting Wall mounting (with optional kit)

## Environmental Limits

Operating Temperature	-40 to 60°C (-40 to 140°F)
Storage Temperature (package included)	-40 to 80°C (-40 to 176°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Shock	IEC 60068-2-27
Vibration	2 Grms @ IEC 60068-2-64, random wave, 5-500 Hz, 1 hr per axis (without USB devices attached)

## Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-3 RS: 1.4 GHz to 6 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 L-PE: 1 kV ; L -L: 0.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	EN 62368-1 UL 62368-1
International Approval	RCM KC BSMI
Green Product	RoHS, CRoHS, WEEE

## MTBF

Time	924,676 hrs
Standards	Telcordia (Bellcore) Standard TR/SR

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x UC-1200A Series computer
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

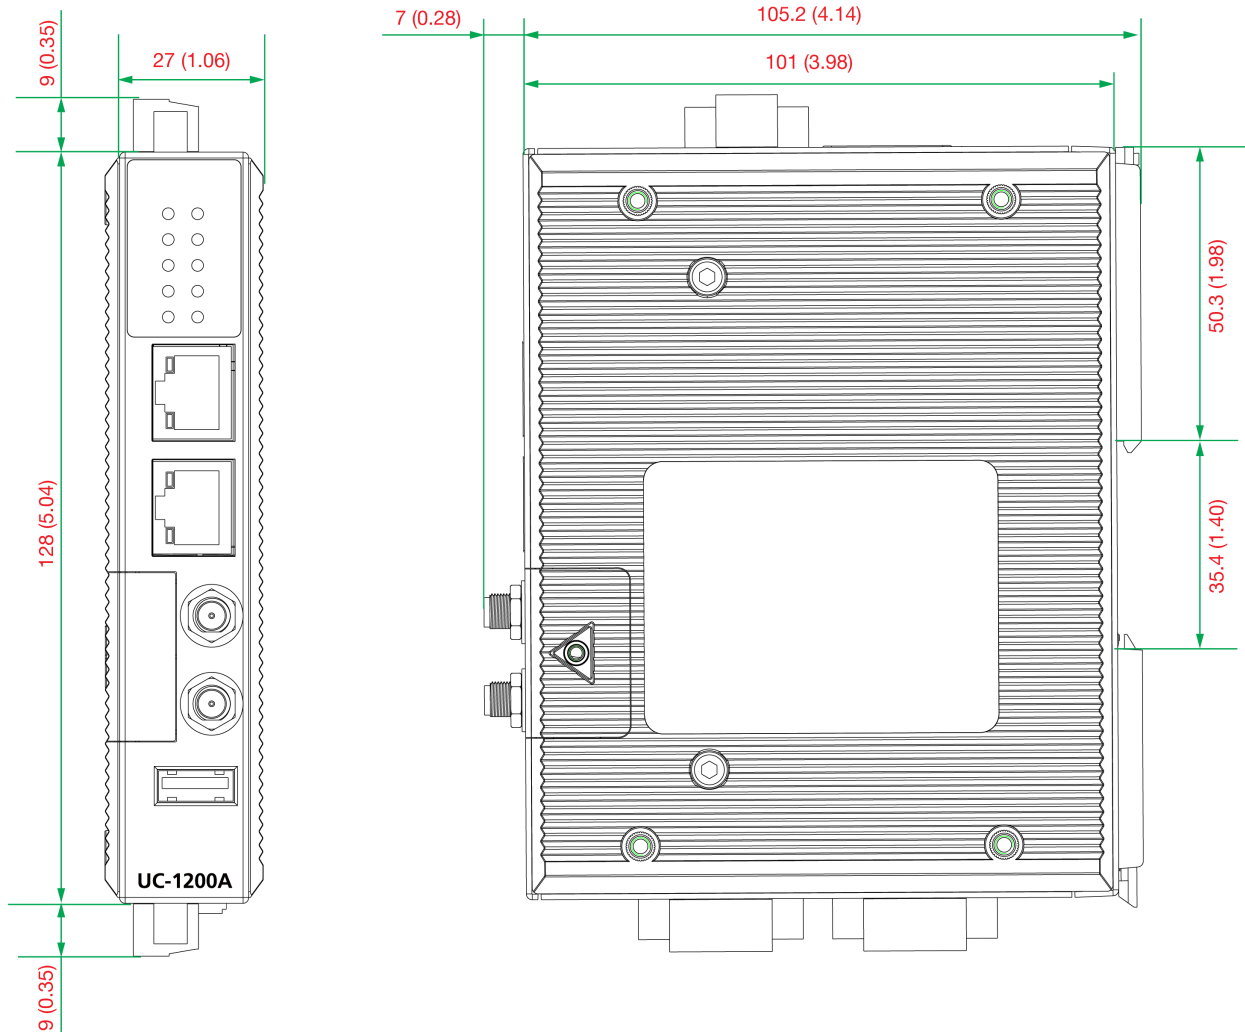

## Ordering Information

Model Name	CPU	RAM	Storage	Storage Slot	mPCIe Socket for Wireless Module	Serial Ports
UC-1222A	Arm8 Cortex-A53 dual-core 1GHz 300 MHz	2 GB	16 GB eMMC	micro SD card	1	2

## Accessories (sold separately)

### Power Adapters

PWR-12150-USJP-SA-T	Locking barrel plug, 12 VDC 1.5 A, 100 to 240 VAC, US/JP plug, -40 to 75°C operating temperature
PWR-12150-CN-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, CN plug, -40 to 75°C operating temperature
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, AU plug, -40 to 75°C operating temperature
PWR-12150-EU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, EU plug, -40 to 75°C operating temperature
PWR-12150-UK-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, UK plug, -40 to 75°C operating temperature

### Cables

CBL-F9DPF1x4-BK-100	Console cable with 4-pin connector, 1 m
CBL-PJTB-10	Non-locking barrel plug to bare-wire cable

### Antennas

ANT-WDB-ARM-0405	2.4/5 GHz 1/2 $\lambda$ 4 to 5 dBi omnidirectional antenna with RP-SMA (female) connector
ANT-WDB-ARM-0202	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male), dual-band, omnidirectional antenna
ANT-LTE-ASM-05 BK	704-960/1710-2620 MHz, LTE stick antenna, 5 dBi
ANT-LTE-ASM-04 BK	704 to 960/1710 to 2620 MHz, LTE omnidirectional stick antenna, 4.5 dBi
ANT-LTEUS-ASM-01	GSM/GPRS/EDGE/UMTS/HSPA/LTE, 1 dBi, omnidirectional rubber-duck antenna
ANT-LTE-OSM-06-3m BK MIMO	Multiband antenna with screw-fastened mounting option for 700-2700/2400-2500/5150-5850 MHz frequencies
ANT-LTE-OSM-03-3m BK	700-2700 MHz, multiband antenna, specifically designed for 2G, 3G, and 4G applications, 3 m cable
ANT-LTEUS-OSM-02	698 to 960/1710 to 2700 MHz, 1/4 $\lambda$ omnidirectional 1.5 dBi antenna with SMA (male) connector

### Wireless Antenna Cables

A-CRF-SMIF-100	Wireless antenna cable package with 2 100-cm cables (SMA connectors)
----------------	--

### Wall-Mounting Kits

WK-33-01	Wall-mounting kit with 2 plates (98.6 x 33.8 x 5 mm), 4 TMS M3 4-mm screws
----------	--

© Moxa Inc. All rights reserved. Updated Dec 19, 2023.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.